

ABOUT HPOWER

hpower actuators combine fastest response times in μs , superior kHz dynamics, high force generation in the range of tens of kN and nanometer precision in a way that is unmatched by any other linear driving system. The actuation can be obtained without any mechanical wear, making the actuators extremely durable. hpower products include ring and stack type actuators, as well as shakers and shock generators. hpower is the result of the collaboration between piezosystem jena and Piezomechanik GmbH and therefore combines centuries of piezo expertise with new innovations.

RING TYPE ACTUATORS SERIES HPSt 1000/25-15 VS35

SERIES HPST WITH CASING AND PRE-LOAD, DIAMETER 35 MM



Concept

Ring type actuators based on a hollow cylindrical design. Compared with stack type actuators, ring actuators have a higher bending stability, better heat management efficiency and allow access to system axis. Given the same volume of PZT material, a ring actuator has a larger total diameter, which results in increase in stability against bending and buckling forces applied to the actuator. Their overall larger surface also removes heat quicker from the system, which allows them to run at much higher frequencies without overheating.


Product highlights

- max. load: 22000 N
- max. force generation: 13000 N
- free opening aperture
- heat abstraction
- high bending stability

Options

- low temperature modification
- ultra high vacuum (UHV) modification
- strain gage (SG) measurement system
- piezo material HP (high power & capacitance)


Applications:




MODAL
ANALYSIS



VIBRATION
CONTROL



MATERIAL
TESTING




MECHANICAL
ENGINEERING

Technical data of HPSt 1000/25-15 VS35 series

type	motion, μm	voltage range, V	Length, mm	resonant frequency, kHz	Blocking force, N	Maximum load, N	Capacity, nF	Stiffness, N/ μm
HPSt 1000/25-15/7 VS35	7	0...+1000	26	40	13000	22000	85	1200
HPSt 1000/25-15/20 VS35	20	0...+1000	35	30	13000	22000	210	600
HPSt 1000/25-15/25 VS35	25	0...+1000	44	25	13000	22000	320	400
HPSt 1000/25-15/40 VS35	40	0...+1000	53	20	13000	22000	420	300
HPSt 1000/25-15/60 VS35	60	0...+1000	71	15	13000	22000	650	180
HPSt 1000/25-15/80 VS35	80	0...+1000	89	12	13000	22000	900	130

Technical drawing of HPSt 1000/25-15 VS35 series

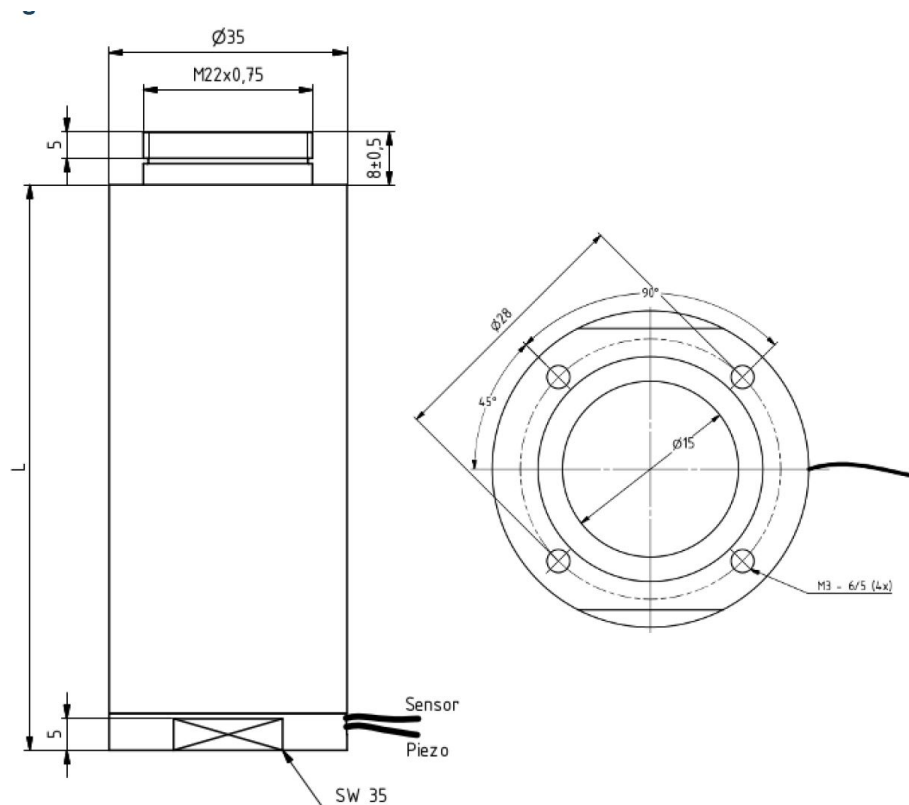

Get in touch with us
and we will help configuring
the best solution.

phone: +1 508-381-0425 (USA) +49 3641 6688-38 (GERMANY)

fax: +1 508-634-6868 (USA) +49 3641 6688-66 (GERMANY)

e-mail: givememore@hpowermotion.com