

## ABOUT HPOWER

hpower actuators combine fastest response times in  $\mu\text{s}$ , superior kHz dynamics, high force generation in the range of tens of kN and nanometer precision in a way that is unmatched by any other linear driving system. The actuation can be obtained without any mechanical wear, making the actuators extremely durable. hpower products include ring and stack type actuators, as well as shakers and shock generators. hpower is the result of the collaboration between piezosystem jena and Piezomechanik GmbH and therefore combines centuries of piezo expertise with new innovations.

## STACK TYPE ACTUATORS SERIES PSt 1000/16 VS25

SERIES PST WITH CASING AND PRELOAD,  
DIAMETER 25 MM



### Concept

Solid Stack type actuators with casing and preload are based on a special smart material known as PZT ceramics. This enables these actuators to achieving outstanding performance with a motion range from  $0\ \mu\text{m}$  to  $150\ \mu\text{m}$  or even higher on request, while generating maximum forces of up to  $12\text{kN}$ . The actuators are available in different lengths, a stack with a length of  $50\ \text{mm}$  usually possesses a maximum motion of  $50\ \mu\text{m}$  to  $70\ \mu\text{m}$  (0.1% - 0.15% of the length)


### Product highlights

- max. load:  $15000\ \text{N}$
- max. force generation:  $12000\ \text{N}$
- high stiffness
- high resonant frequency

### Options

- low temperature modification
- ultra high vacuum (UHV) modification
- strain gage (SG) measurement system
- piezo material HP (high power & capacitance)


### Applications:




MODAL  
ANALYSIS



VIBRATION  
CONTROL



MATERIAL  
TESTING




MECHANICAL  
ENGINEERING

### Technical data of PSt 1000/16 VS25 series

type	motion, $\mu\text{m}$	voltage range, V	Length, mm	resonant frequency, kHz	Blocking force, N	Maximum load, N	Capacity, nF	Stiffness, N/ $\mu\text{m}$
PSt 1000/16/7 VS25	7	0...+1000	29	40	12000	15000	60	800
PSt 1000/16/20 VS25	20	0...+1000	35	35	12000	15000	150	400
PSt 1000/16/40 VS25	40	0...+1000	53	30	12000	15000	360	200
PSt 1000/16/60 VS25	60	0...+1000	71	27	12000	15000	540	120
PSt 1000/16/80 VS25	80	0...+1000	89	23	12000	15000	720	90
PSt 1000/16/100 VS25	100	0...+1000	107	20	12000	15000	900	75
PSt 1000/16/150 VS25	150	0...+1000	147	7	12000	15000	1400	50

### Technical drawing of PSt 1000/16 VS25 series

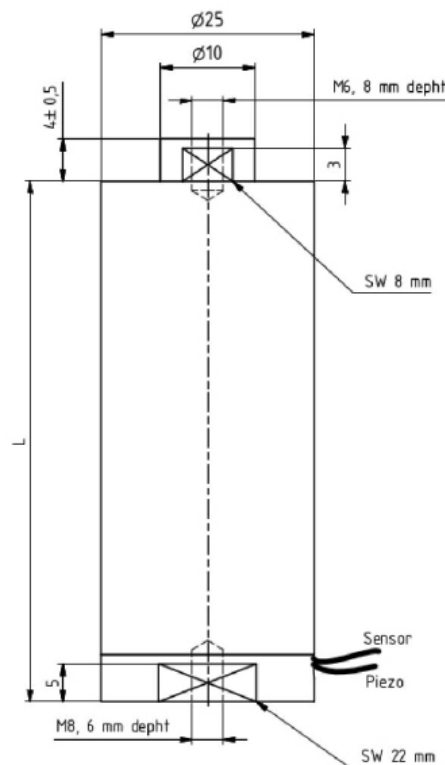

Get in touch with us  
and we will help configuring  
the best solution.

phone: +1 508-381-0425 (USA) +49 3641 6688-38 (GERMANY)

fax: +1 508-634-6868 (USA) +49 3641 6688-66 (GERMANY)

e-mail: [givememore@hpowermotion.com](mailto:givememore@hpowermotion.com)